

LINKaLIGHT™

by Western Technology Inc.

Designed + Manufactured + Serviced in the USA

ORDINARY
LOCATION
LIGHTING




Model 4400 - Industrial LED String Light System

January 2026




What Sets LINKaLIGHT Apart?

Its adjustable brightness allows you to easily change the light output from 600 to 8,300 lumens with an optional dimmer. This is super handy for different job sites, from small spaces in an airplane to big tunnels. The LED COB gives off a clear bright light at a color temperature of 5700K. The system also has a wide light spread with a 75° reflective optic angle and a 100° observed beam angle.

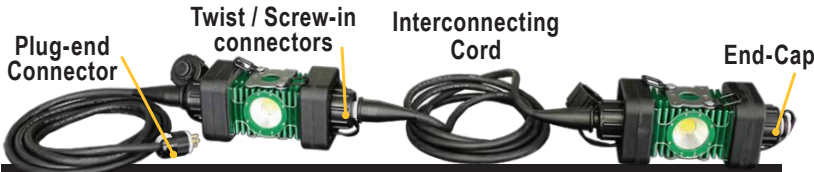

Product Features

Light Output: Optional Variable Intensity Control (Dimmer) with a continuous range in Luminous Flux: 600 to +8,300 lumens	Adjustable Brightness: High: ~4,000 Lux Low: ~400 Lux @ 1ft.
	Observed Beam Angle: ~100° (Floodlight Projection)
Light Source: COB LED	Reflective Optic Angle: ~75° (Floodlight Projection)
Power Output: 120-277 VAC, 50/60 Hz	Color Temperature: ~5700K, 70CRI
Material Construction: Light Body: 6061-T6 Aluminum Bumpers: Polyurethane	Dimensions: 8.0" Length X 4.25" Width X 4.25" Depth
Special Features: - Adjustable Brightness (optional) - Able to plug end-to-end - Daisy-chain lights together up to 250ft. - Thermally regulated for safe handling - Variety of mounting options available	Weight Lighthead: ~5.3 lbs
	Accessories: #4400 Blast Shield (single) #4400 Bspak - 12 (Box 12 blast shields) #4400 SCAFF MT - Scaffolding Mount #4400 LINKaLIGHT Dome Diffuser

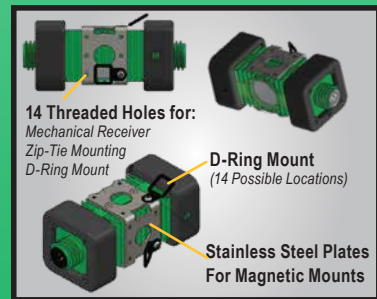

*Equipment specifications, options & availability subject to change.



Western Technology, Inc. | Toll Free: (800) 654-5483
 3517 Arsenal Way | Local: (360) 917-0080
 Bremerton, WA 98312 | Fax: (360) 917-0083
www.WesternTechnologyLights.com

WTT Western Technology
 LIGHTS CERTIFIED, TRUST EARNED